

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number  
**WO 2004/014197 A1**

(51) International Patent Classification<sup>7</sup>: A47F 7/14, 5/11

(21) International Application Number:  
PCT/GB2003/003363

(22) International Filing Date: 1 August 2003 (01.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0218529.6 9 August 2002 (09.08.2002) GB

(71) Applicant (for all designated States except US): LIGHT-  
HOUSE DISPLAY INTERNATIONAL LIMITED  
[GB/GB]; The Thunderbay Works, Crossgate Drive,  
Nottingham NG2 1LQ (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SPEED, Neil, Hugh,

Forsyth [GB/GB]; The Thunderbay Works, Crossgate  
Drive, Nottingham NG2 1LQ (GB). SIMPSON, Alec,  
Michael [GB/GB]; The Thunderbay Works, Crossgate  
Drive, Nottingham NG2 1LQ (GB).


(74) Agent: HULSE, Graham; Hulsemarque, 157 Sandygate  
Road, Sheffield S10 5SA (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: DISPLAY DEVICE AND BLANK THEREOF

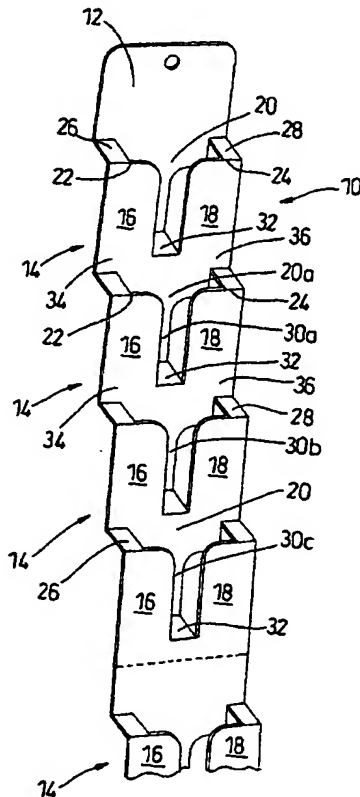

(57) Abstract: A display device (10) comprises an elongate strip (12) of sheet material having a plurality of product carrying pockets (14) each pocket (14) being provided with a pair of laterally spaced front sections (16, 18) in a plane substantially parallel to the plane of an adjacent rear section (20) of the elongate strip (12), each front section (16, 18) being attached to said rear section (20) at its upper edge (22, 24) respectively, by means of upper bridge portions (26, 28), further attachment between a further section (30) of the rear section (20) and the front sections (16, 18) is provided by a lower bridge portion (32) intermediate the front sections (16, 18) and which is attached adjacent the lower edges (34, 36) thereof.

BEST AVAILABLE COPY

WO 2004/014197 A1